

Concepts & Terminology

Concepts & Terminology are summarized below with *text in italic*.

The application is commonly referred to as *Naming*, *Naming tool*, *Naming convention tool*. It is a web application that includes a REST API for read purposes and it is connected to a database for storage of names and structures. Naming is the most common way to refer to both application and system as a whole.

In the process of refactoring, the application is split into a backend part and a frontend part, known as *Naming backend* and *Naming frontend*.

The purpose of Naming

Handle Naming of ESS wide physical and logical devices according to ESS Naming Convention

What is a Name?

<i>ESS Name</i>	<i>System structure</i>	<i>Device structure</i>
	<i>Which part of the facility does the device provide service to?</i>	<i>What kind of service does the device provide?</i>
<i>Must refer to System structure</i>	<i>1 System Group</i>	<i>1 Discipline</i>
<i>May refer to Device structure</i>	<i>2 System</i>	<i>2 Device Group</i>
<i>May have index for instance</i>	<i>3 Subsystem</i>	<i>3 Device Type</i>

System structure and Device structure are hierarchies with 3 levels each. A 3rd level entry refers to 2nd level entry that refers to 1st level entry. A name must refer to System structure (arbitrary level) and may refer to Device structure (level 3). If Device structure is referred to, then index is to be set.

An entry, for name and structure, has a common set of attributes such as uuid, name, mnemonic, description, comment, when requested and by whom, when processed and by whom, etc.

Each entry is identified by its universal identifier, also known as uuid. It is the common denominator to keep track of an entry through its lifecycle, e.g. when the entry is created, updated, deleted. An entry usually has another attribute called *mnemonic* which is a short name that is to be unique in its namespace. This attribute is called *mnemonic* for an entry in System structure or Device structure. For a names entry, this attribute is called *index*.

In addition, there is an attribute called name equivalence or mnemonic equivalence. This is derived from name or mnemonic by taking similar-looking characters into account and helps to ensure that name and mnemonic is unique within its namespace.

Mnemonic equivalence

o, O, 0 considered same from equivalence point-of-view

i, I, l, L, 1 considered same from equivalence point-of-view

leading 0 numerical characters removed

Uniqueness of an entry

Each entry has a unique uuid that acts as key in its line of history. This applies for both name and structure entries.

An entry in names, System structure, Device structure must have attributes such that it is unique in its namespace at any given time. This is achieved with proper values for mnemonic and index.

Namespace for a name entry is all valid names.

Namespace for structure entry is its hierarchy.

Rules for names and structures

Structures


System, Subsystem, Discipline, Device Type must have mnemonic.

System Group may have mnemonic.


Device Group must not have mnemonic.

<i>ESS Name</i>	<i>=</i>	<i>System Group</i>				
		<i>System Group</i>	<i>+</i>	<i>Device Type</i>	<i>+</i>	<i>Index</i>
		<i>System</i>				
		<i>System</i>	<i>+</i>	<i>Device Type</i>	<i>+</i>	<i>Index</i>
		<i>Subsystem</i>				
		<i>Subsystem</i>	<i>+</i>	<i>Device Type</i>	<i>+</i>	<i>Index</i>


Visualization – names and structures

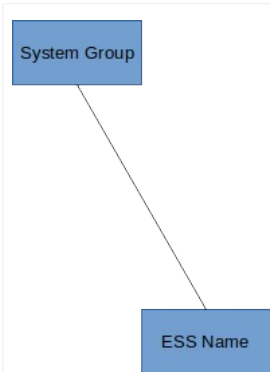


Acc

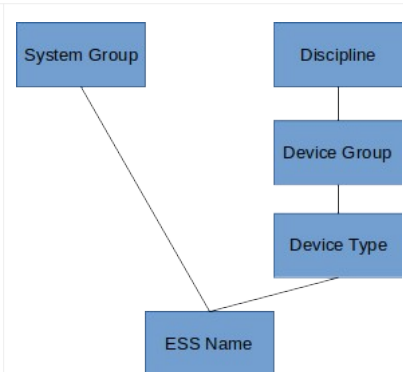


Acc:RFS-PrlTap-054

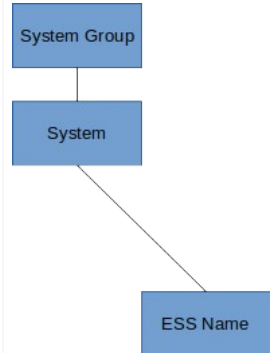


A2T

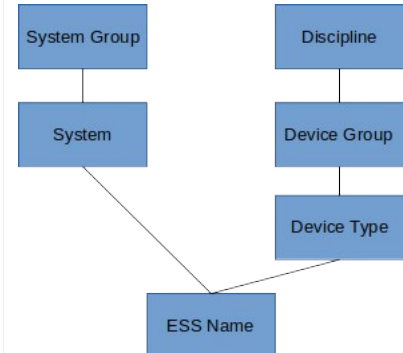

A2T:RFS-PrlTap-054

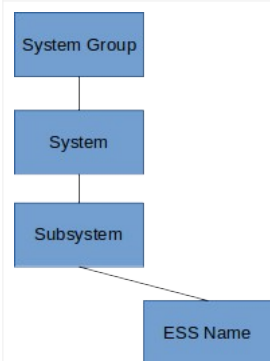

A2T-010PRL

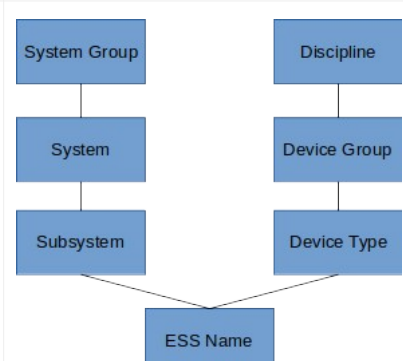

A2T-010PRL:RFS-PrlTap-054

Lifecycle for names and structures

An entry for names is valid when it is created and saved. It does not go through an approval process. The entry may be modified multiple times. When entry is deleted, it has reached its end-of-life and may no longer be modified. A special case is if entry is considered legacy. This is the case if a parent is deleted. Then entry will remain but may no longer be modified except deleted. Any change may be done by user. The term legacy is introduced in the latest Naming convention.

An entry for System structure and Device structure needs to go through an approval process for any change. This includes create, modify, delete changes for an entry. The entry may be modified multiple times. When entry is deleted, it has reached its end-of-life and may no longer be modified. Any change is proposed by user and approved by administrator. A user may cancel request for change. An administrator may approve or reject request for change.

The whereabouts in the lifecycle for names and structures is handled with attributes status, latest and deleted. When an entry is deleted (names) or deleted and approved (structures), it has reached its end-of-line.

A change for an entry is handled such that a new entry is created. When the new entry is approved, attribute latest is set to true. Attribute latest for earlier entry is set to false. For any line of uuid, there may be zero or one entry with latest set to true.

Default behavior

Default behavior for Naming is to handle valid entries. Therefore old values are excluded unless history requested. This means that old values can not be browsed but must be requested. Latest entry in line of uuid is available for browsing.

Examples

Purpose of examples is to show lifecycle of names and structures. Therefore some columns are not shown, e.g. references to parents. A name has references to parents in System structure and Device structure. A structure entry has reference to a parent.

In addition, examples contain information from both user side and storage side.

Names

id	uuid	name	description	status	latest	deleted
1	a	A2T-010PRL:RFS-PRLTap-052	comment	APPROVED	false	false
2	a	A2T-010PRL:RFS-PRLTap-053	comment	APPROVED	false	false
3	a	A2T-010PRL:RFS-PRLTap-054	comment	APPROVED	true	false
4	b	A2T-010PRL	comment 1	APPROVED	false	false
5	b	A2T-010PRL	comment 2	APPROVED	true	true
6	c	A2T	comment	APPROVED	true	false

Structures - e.g. System

id	uuid	mnemonic	description	status	latest	deleted
1	m	A0T	comment	PENDING	false	false
2	n	A1T	comment	PENDING	false	false
3	n	A1T	comment	APPROVED	true	false
4	o	A2T	comment	PENDING	false	false
5	o	A2T	comment	APPROVED	true	false
6	o	A3T	comment	PENDING	false	false
7	o	A3T	comment	CANCELLED	false	false
8	p	A4T	comment	PENDING	false	false
9	p	A4T	comment	APPROVED	false	false
10	p	A5T	comment	PENDING	false	false
11	p	A5T	comment	REJECTED	false	false
12	p	A5T	comment a	PENDING	false	false
13	p	A5T	comment a	APPROVED	true	false
14	q	A6T	comment	PENDING	false	false
15	q	A6T	comment	APPROVED	true	false
16	q	A6T	comment	PENDING	false	true
17	q	A6T	comment	REJECTED	false	true
18	r	A7T	comment	PENDING	false	false
19	r	A7T	comment	APPROVED	false	false
20	r	A7T	comment	PENDING	false	true
21	r	A7T	comment	APPROVED	true	true

Each time a modification is requested or processed, it will result in a new entry.

Each time a modification is processed (Structure), it will result in a new entry.

There is approval process for Structure but there is no approval process for Name.

When a modification is approved, its status attribute will be set to APPROVED and latest attribute set to true. For any given line of uuid, there may be 0 or 1 entry with latest attribute set to true. Latest attribute indicates if entry is latest and approved in its line of uuid.

An entry with attribute deleted set to true that has been APPROVED has reached its end-of-line.

Rows with gray background color are considered history and are excluded unless history is requested. Rows become history when there is a more recent entry with status APPROVED and latest set to true. History for an entry may be requested through its uuid.

The lifecycle for names and structures are handled with attributes status, latest, deleted as shown in examples above.

status – APPROVED, CANCELLED, REJECTED, PENDING

latest – true, false

deleted – true, false

The lifecycle may be simplified for easier handling, in particular for when information is read.

Combinations of status, latest, deleted may be handled by finite set of values

ACTIVE, LEGACY, OBSOLETE, PENDING

ACTIVE	approved, latest = true, deleted = false
LEGACY	entry is ACTIVE but with deleted parent
OBSOLETE	entry is outdated (more recent entry available) or CANCELLED, REJECTED or deleted
PENDING	entry has modification that is requested but not yet processed

A value that is no longer valid corresponds to OBSOLETE.

Note that user needs to set values for attributes status, latest, deleted when an entry is created, modified or deleted.

Expected values for attributes status, latest, deleted when an entry is created, modified or deleted

create – status PENDING, latest false, deleted false

modify – status PENDING, latest false, deleted false

deleted – status PENDING, latest false, deleted true